 Hrabinská 498/19, 737 01
Český Těšín, Czechy

 +420 603 933 363

 email: office@valwo.eu

 www.valwo.eu

GRAPHITE SERIES RUPTURE DISC

GD, GDI, GDV, GDL, GDT, GDHT, GDIHT, GDVHT RUPTURE DISC

Fike Graphite Series Rupture Discs are simple and reliable pressure relief devices. Our Graphite Discs are manufactured to be virtually impermeable which results in excellent corrosion resistance to most acids and corrosive media, resistance to temperature and long term stability. The discs install directly between pipe flanges eliminating the need for a holder and have a variety of gasket material and attachment options.

Fike graphite rupture discs are easily customizable to the customer's exact specifications. Each disc is additionally offered with a "Zero" manufacturing range as the standard allowing each lot of graphite rupture discs to be marked with the requested burst pressure, at the requested temperature. Maximum variation from the marked pressure is expressed as the rupture tolerance in accordance to the table shown on next pages.



Rupture disc - GRAPHITE SERIES:
GD, GDI, GDV, GDL, GDT, GDHT, GDIHT, GDVHT


GD SERIES

The GD Series meets most processing applications. The disc is available in diameters from 1/2 to 24 inches at burst pressures from .25 to 150 PSIG (.02 to 10.34 BARG) for specified temp. up to 430°F (221°C) without insulation.




GDI SERIES

GDI Series Discs are designed to fit standard ASME Class 150 and Class 300 flanges. Inverted discs have the same temperature characteristics as GD discs but offer higher burst pressures.

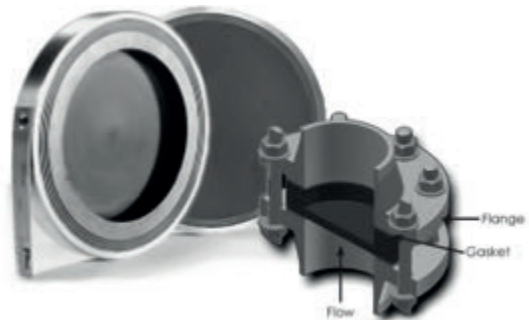


GDL SERIES

GDL Discs extend corrosion resistance to highly oxidizing agents, halogens and virtually all other corrosives, except free fluorine. A liner is used as a permanent barrier on the service side of the disc. PTFE is the standard liner material but others are available upon request. Additionally, these discs are suitable for specified temp. up to 430°F without insulation.

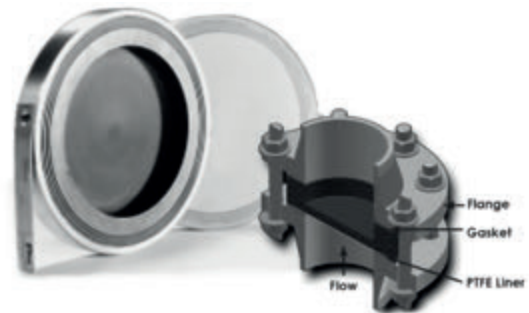

GDHT, GDIHT, GDVHT SERIES

High temperature rated discs are available in GD, GDV and GDI styles to accommodate specified temperatures up to 700°F. They are furnished as an attached unit as shown because the nameplate rating of the disc must be established at the cold face temperature of the insulation. GDHT, GDVHT, GDIHT discs utilize fibrous silica and alumina which is not suitable with liquid applications, and can be attacked by hydrofluoric and phosphoric acids and concentrated alkalis.

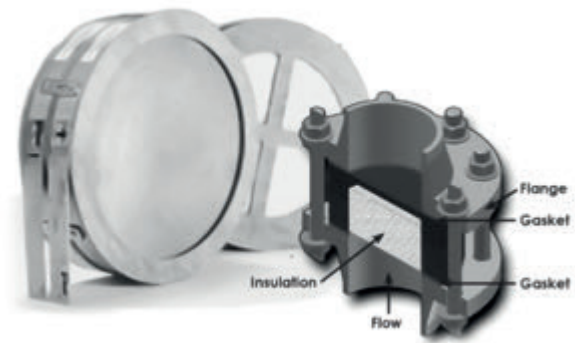

GDV SERIES (NOT SHOWN)

The GDV Series rupture disc is intended for use in vacuum service applications. The GDV rupture disc utilizes one of four vacuum support types and is required for burst pressures less than 20 PSIG (1.38 BARG) in full vacuum conditions for specified temperatures up to 430°F (221°C) without insulation. For required vacuum support types see reference guide on page 4.

GDT SERIES (NOT SHOWN)

GDT Discs have two ratings, one for overpressure and the other for vacuum protection. GDT discs have a temperature range of -290°F to 430°F (-179°C to 221°C) and are most commonly used on single entry storage vessels or manifold vents.

RUPTURE TOLERANCE





Specified Burst Pressure	Rupture Tolerance
Above 40 PSIG (2.76 BARG)	± 5%
15 PSIG (1.03 BARG) - 40 PSIG (2.76 BARG)	± 2 PSIG (.14 BARG)
5 PSIG (.34 BARG) < 15 PSIG (1.03 BARG)	± 1 PSIG (.07 BARG)
> 1 PSIG (.07 BARG) < 5 PSIG (.34 BARG)	± .75 PSIG (.05 BARG)
≤ 1 PSIG (.07 BARG)	- 0/+ .75 PSIG (.05 BARG)

OPTIONAL PERFORMANCE TOLERANCES AVAILABLE

Performance Tolerance	Tolerance*
Special Min/Max	Included
± 5% Performance Tolerance	± 5% of Specified burst pressure
± 10% Performance Tolerance	± 10% of Specified burst pressure

* Performance tolerances can be ordered if total tolerance is greater or equal to standard rupture tolerance for the specified burst pressure range.

HOW TO SPECIFY

Performance Attributes		Process Media	
Operating Ratio*	Vacuum Resistant	Liquid	Vapor / Gas
			
90%	Yes	Yes	Yes

* Operating ratio varies based on burst pressure and heavy cyclic duty.

APPROVALS

- ASME
- CE Marked

SPECIAL CONSIDERATIONS

1) Carbon steel or stainless steel armoring is optional for all graphite rupture discs. For added safety and reliable performance, armoring is strongly recommended for higher pressures.

2) Carbon steel armoring is required on the following discs:

- a) All discs for ANSI Class 300 flanges
- b) All discs rated above 338°F
- c) For toxic or flammable environments
- d) All high temperature rated discs
- e) GDT Series discs
- f) All discs above the following pressure ratings:

Disc Size	Burst Pressure @ 72°F(22°C)
1/2 - 3 IN	150 PSIG (10.34 BARG)
4 IN	100 PSIG (6.89 BARG)
6 - 10 IN	75 PSIG (5.17 BARG)
12-24 IN	50 PSIG (3.45 BARG)

3) The GDHT, GDIHT and GDVHT models are provided with compressed fiber gaskets standard for temperatures above 430°F (221°C).

4) Attached and loose gaskets are available in the following materials:

Standard Gasket Materials	Thickness (IN)	Max Temp
Compressed Fiber (Non -Asbestos)	1/8	400°F (204°C)
Neoprene	1/8	212°F (100°C)
PTFE (Solid)	1/8	450°F (232°C)
PTFE (Envelope)	1/8	450°F (232°C)

Consult factory for other available gasket materials.

5) PTFE Coatings are available on the process side, downstream side, or both sides. An additional special sealing process is also available to improve leak tightness when required. Consult Fike for more information.

6) All graphite discs will fragment upon burst.

7) GD Series standard burst pressures for ANSI 150 flanges sizes 1 to 8 IN are: 10, 15, 20, 25, 30, 40, 50, 75, 100, 125, 150 PSIG @ 72°F (.69, 1.03, 1.38, 1.72, 2.07, 2.76, 3.45, 5.17, 6.89, 8.62, 10.34 BARG @ 22°C). Sizes 6" and 8" for ANSI 150 flanges sizes will be supplied as a GDI. The burst pressures are: 125, 150 PSIG @ 72°F (8.62, 10.34 BARG @ 22°C).

8) GDI Series standard burst pressures for ANSI 300 flanges sizes 1 to 3 IN are: 175, 200, 225, 250, 275, 300 PSIG @ 72°F (12.07, 13.79, 15.51, 17.24, 18.96, 20.68 BARG @ 22°C).

9) ASME UD Certification is available for the following disc models: GD, GDV, GDI, GDL.

10) CE Certification is available for the following disc models: GD, GDV, GDI, GDL, GDT.

11) Integral Burst Indication is also available for all series graphite discs in sizes 1 IN and larger and comes installed by the manufacturer on the disc with gaskets attached and ready for installation. Acceptable gaskets for use with the integral burst indicator include Compressed Fiber, TFE, and Gylon.

HOW TO SPECIFY

To order the Graphite Rupture Disc, please specify the following as a minimum:

Previous Lot Number:	
	OR
Model	
Size	
Flange rating	ANSI 150, 300, or other
Burst Pressure	@ (Temperature)
Accessories (specify)	Gaskets Armoring TFE Coating Liner
Gasket Attached:	Yes/No
Gasket Material:	
Certifications	ASME / CE

GDV REQUIRED VACUUM SUPPORT GUIDE*

Size (IN)	Burst Pressure	Support Type
1	below 20 PSIG (1.38 BARG)	Ring
1 ½	below 20 PSIG (1.38 BARG)	Bar
2-14	9 to 19 PSIG (.62 to 1.31 BARG)	Bar
2-14	5 to 8 PSIG (.34 to .55 BARG)	Cross
2-14	< 5 PSIG (.34 BARG)	Plate

* GDV discs are required for all burst pressures under 20 PSIG (1.38 BARG) for full vacuum service. Not available in 1/2 and 3/4 IN sizes. Consult factory for sizes larger than 14 IN.

GD, GDV, GDHT, GDVHT SERIES

BURST PRESSURES & DIMENSIONS

Fits Class 150 ASME Flanges									
IN	DN	Diameter (IN)		Thickness (IN)*		Burst Pressures		Gasket I.D.	Gasket O.D.
		I.D.	O.D.	GD, GDV	GDHT, GDVHT	Min. PSIG (BARG)	Max PSIG (BARG)		
0.50	15	0.622	1 ¾	5/8	1 ¾	25 (1.72)	150 (10.34)	7/8	1 ¾
0.75	20	0.824	2 1/8	5/8	1 ¾	25 (1.72)	150 (10.34)	1 1/8	2 1/8
1	25	1	2 ½	7/8	2 ¼	10 (.69)	150 (10.34)	1 5/16	2 ½
1.5	40	1 ½	3 ¼	7/8	2 ¼	7 (.48)	150 (10.34)	1 29/32	3 ¼
2	50	2	4	7/8	2 ¼	3 (.21)	150 (10.34)	2 ½	4
3	80	3	5 ¼	7/8	2 ¼	2 (.14)	150 (10.34)	3 ¾	5 ¼
4	100	4	6 ¾	7/8	2 ¼	1.50 (.10)	150 (10.34)	5	6 ¾
6	150	6	8 5/8	7/8	2 ¼	1 (.07)	100 (6.89)	7 1/8	8 5/8
8	200	8	10 7/8	1 1/8	2 ¾	.50 (.03)	100 (6.89)	8 7/8	10 7/8
10	250	10	13 ¼	1 ½	3 3/8	.25 (.02)	100 (6.89)	11 5/8	13 ¼
12	300	12	16	2	4 3/8	.25 (.02)	75 (5.17)	13 ¾	16
14	350	13 ¼	17 5/8	2 ¼	4 7/8	.25 (.02)	50 (3.45)	14 ½	17 5/8
16	400	15 ¼	20 1/8	2 ½	5 3/8	.25 (.02)	50 (3.45)	17	20 1/8
18	450	17 ¼	21 ½	2 ¾	5 7/8	.25 (.02)	50 (3.45)	19 ½	21 ½
20	500	19 ¼	23 ¾	3	6 3/8	.25 (.02)	40 (2.76)	21 ¾	23 ¾
24	600	23 ¼	28 1/8	3	6 3/8	.25 (.02)	25 (1.72)	25	28 1/8

GDI, GDL* & GDIHT SERIES

BURST PRESSURES & DIMENSIONS

Fits Class 150 ASME Flanges										
IN	DN	Diameter (IN)		Thickness (IN)*		Burst Pressures			Gasket I.D.	Gasket O.D.
		I.D.	O.D.	GDI, GDL	GDIHT,	GDI, GDHI T Min. PSIG (BARG)	GDL Min PSIG (BARG)	Max PSIG (BARG)		
0.50	15	0.622	1.34	5/8	1 3/4	25 (1.72)	25 (1.72)	>1000 (68.95)	7/8	1/34
0.75	20	0.824	2 1/8	5/8	1 3/4	25 (1.72)	25 (1.72)	>1000 (68.95)	1 1/8	2 1/8
1	25	1	2 1/2	7/8	2 1/4	10 (.69)	10 (.69)	>1000 (68.95)	1 5/16	2 1/2
1.5	40	1 1/2	3 1/4	7/8	2 1/4	7 (.48)	7 (.48)	1000 (68.95)	1 29/32	3 1/4
2	50	2	4	7/8	2 1/4	3 (.21)	3 (.21)	300 (20.68)	2 1/2	4
3	80	3	5 1/4	7/8	2 1/4	2 (.14)	2 (.14)	300 (20.68)	3 3/4	5 1/4
4	100	4	6 3/4	7/8	2 1/4	1.50 (.10)	1.5 (.10)	250 (17.24)	5	6 3/4
6	150	6	8 5/8	7/8	2 1/4	1 (.07)	1 (.07)	170 (11.72)	7 1/8	8 5/8
8	200	8	10 7/8	1 1/8	2 3/4	.50 (.03)	.75 (.05)	170 (11.72)	8 7/8	10 7/8
10	250	10	13 1/4	1 1/2	3 3/8	.25 (.02)	.50 (.03)	150 (10.34)	11 5/8	13 1/4
12	300	12	16	2	4 3/8	.25 (.02)	.50 (.03)	150 (10.34)	13 3/4	16
14	350	13 1/4	17 5/8	2 1/4	4 7/8	.25 (.02)	.50 (.03)	150 (10.34)	14 1/2	17 5/8
16	400	15 1/4	20 1/8	2 1/2	5 3/8	.25 (.02)	.50 (.03)	150 (10.34)	17	20 1/8
18	450	17 1/4	21 1/2	2 3/4	5 7/8	.25 (.02)	.50 (.03)	150 (10.34)	19 1/2	21 1/2
20	500	19 1/4	23 3/4	3	6 3/8	.25 (.02)	.50 (.03)	150 (10.34)	21 3/4	23 3/4
24	600	23 1/4	28 1/8	3	6 3/8	.25 (.02)	.50 (.03)	150 (10.34)	25	28 1/8

GDI, GDL* & GDIHT SERIES

BURST PRESSURES & DIMENSIONS

Fits Class 300 ASME Flanges										
IN	DN	Diameter (IN)		Thickness (IN)*		Burst Pressures			Gasket I.D.	Gasket O.D.
		I.D.	O.D.	GDI, GDL	GDIHT,	GDI, GDHI T Min. PSIG (BARG)	GDL Min PSIG (BARG)	Max PSIG (BARG)		
0.50	15	0.622	2	5/8	1 3/4	25 (1.72)	25 (1.72)	>1000 (68.95)	7/8	2
0.75	20	0.824	2 1/2	5/8	1 3/4	25 (1.72)	25 (1.72)	>1000 (68.95)	1 1/8	2 1/2
1	25	1	2 3/4	1	2 1/2	10 (.69)	10 (.69)	>1000 (68.95)	1 5/16	2 3/4
1.5	40	1 1/2	3 5/8	1	2 1/2	7 (.48)	7 (.48)	>1000 (68.95)	1 29/32	3 5/8
2	50	2	4 1/4	1	2 1/2	3 (.21)	3 (.21)	500 (34.47)	2 1/2	4 1/4
3	80	3	5 3/4	1 1/4	3	2 (.14)	2 (.14)	500 (34.47)	3 3/4	5 3/4
4	100	4	7	1 1/4	3	1.50 (.10)	1.5 (.10)	500 (34.47)	5	7
6	150	6	9 3/4	1 3/4	4	1 (.07)	1 (.07)	450 (31.03)	7 1/8	9 3/4
8	200	8	12	2 1/4	5	.50 (.03)	.75 (.05)	450 (31.03)	8 7/8	12

* GDL Disc are supplied standard with a PTFE liner. FEP, PFA, KYNAR® and Halar® are available upon request only.

** GDI and GDL disc thicknesses do not include gaskets. GDIHT disc thicknesses include all gaskets.

Note: External Vacuum supports are available for the GDL model. ASME not available with external vacuum support configuration. Consult factory for more information.

GDT SERIES BURST PRESSURES & DIMENSIONS

IN	DN	Disk Dimension		Thickness (IN)*	Min. PSIG (BARG)
		Diameter (IN)			
		I.D.	O.D.		
1.5	40	1 ½	3 ¼	1 1/8	7 (.48)
2	50	2	4	1 1/8	3 (.21)
3	80	3	5 ¼	1 1/8	2 (.14)
4	100	4	6 ¾	1 1/8	1.50 (.10)
6	150	6	8 5/8	1 1/8	1 (.07)
8	200	8	10 7/8	1 3/8	.50 (.03)
10	250	10	13 ¼	1 ¾	.25 (.02)
12	300	12	16	2 ¼	.25 (.02)
14	350	13 ¼	17 5/8	2 ½	.25 (.02)
16	400	15 ¼	20 1/8	2 ¾	.25 (.02)
18	450	17 ¼	21 ½	3	.25 (.02)
20	500	19 ¼	23 ¾	3 ¼	.25 (.02)
24	600	23 ¼	28 1/8	3 ¼	.25 (.02)

* Disc thickness includes all gaskets.

Notes: A minimum differential of 10 PSIG (.69 BARG) is required between burst pressures. For other burst pressure combinations consult factory.